




ALLIED INNOVATIONS, LLC



Manufacturing the Product Lines of Len Gordon
7215 Bermuda Rd Las Vegas NV 89119-4304
Phone (702) 361-0600 Fax (702) 361-0613

#15 BUTTON

Designed for fiberglass, wood, gunite, and jetted spa applications. Up to 150-foot control distance with relay-operated controls.

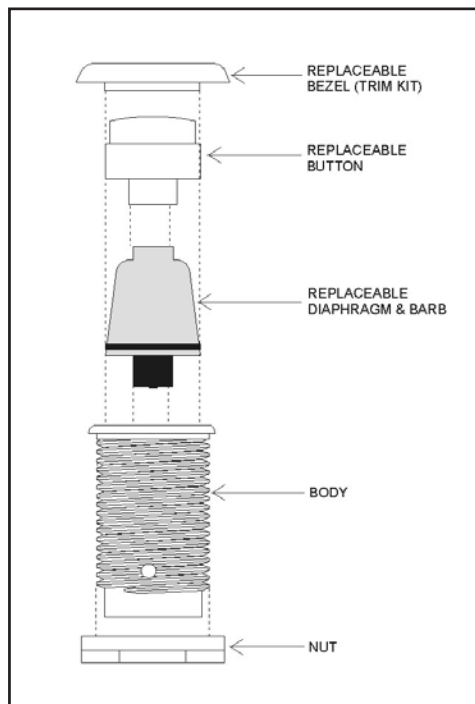

CAUTION:

Make sure vinyl tubing is free of kinks and protected from any rough edges or heater equipment. If tubing is to be routed outside of spa enclosure, install the tubing in a non-conductive conduit between the air button and the control. Use sweep elbows or form large-radius curves in the pipe with a heat gun. Flexible pipe may also be used. Do not use 90° elbows. Install only with non-conductive 1/8" I.D. vinyl tubing. Do not allow water or foreign materials to enter the tubing.

NOTE:

Blowing into tubing introduces condensation from your breath. If the tubing must be blown out, use dry compressed air.

MANY COLORS TO CHOOSE FROM!

Almond Bone
Biscuit
Black
Bone-Beige
Country Grey
Dresden Blue
Dusty Rose
Fawn Beige
French Vanilla
Innocent Blush
Island Sea
Navy
Peach Bisque
Raspberry Puree
Shell
Silver Grey
Teal
White
Wild Rose

Designer Touch

Trim Kits:


Black
White

Metal Trim Kits:

Antique Brass
Antique Copper
Brushed Bronze
**Brush Stainless
**Chrome
Matte Black
**Oiled Rubbed Bronze
Pearl Nickel
Pewter
Polished Brass
Polished Copper
Polished Gold
**Polished Nickel
Polished Stainless
PVD Brass
Satin Chrome
Satin Gold
**Satin Nickel
Venetian Bronze
Weathered Brass
Weathered Copper


***Available Finishes for Allied's #16 Square Buttons.*

BUTTON ASSEMBLY



GUNITE INSTALLATION

Cut 1 1/4" sched. 40 pipe flush after tile installation. Button will press fit into internal diameter of pipe. Due to irregularities in pipe size, some sanding of threads may be required.

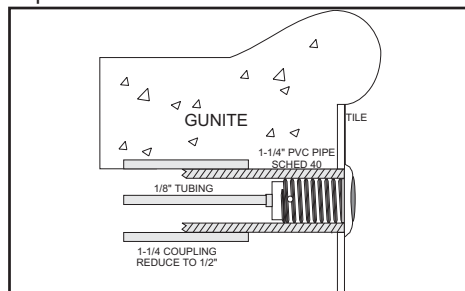

READ AND SAVE THESE INSTRUCTIONS